


## Frameless Roof Lights



Double Glazed Frameless Roof Light

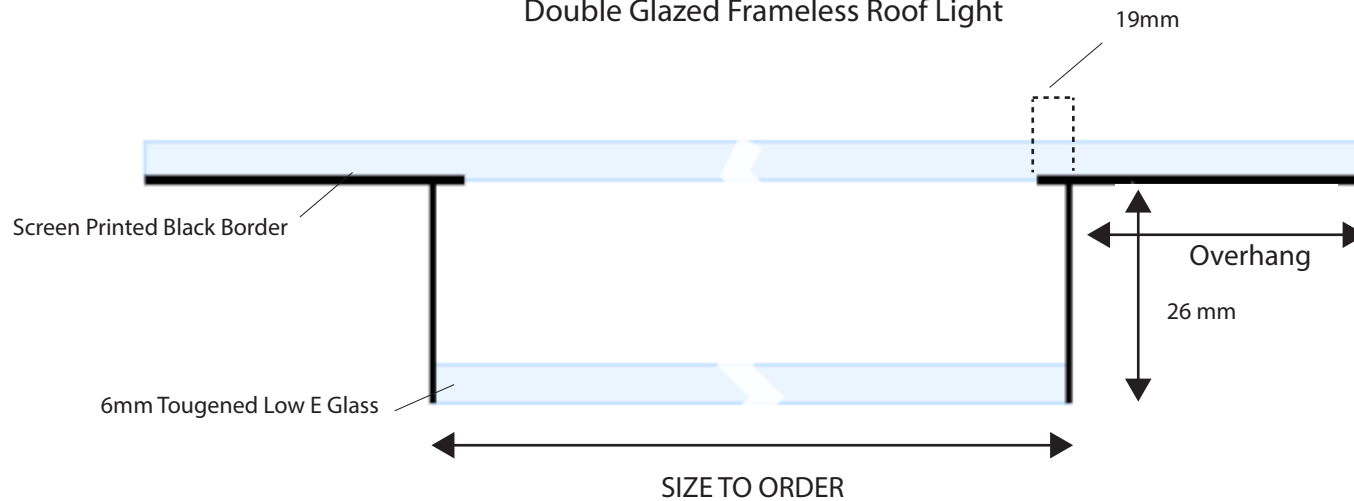

### Overhang


The overhang will always be 19mm less than the chosen border size on every side


Chosen Border	Overhang
82mm	63mm
100mm	81mm
150mm	131mm

### Clearance

Always allow 5 mm Clearance between your timber frame and the glass.

Triple Glazed Frameless Roof Light

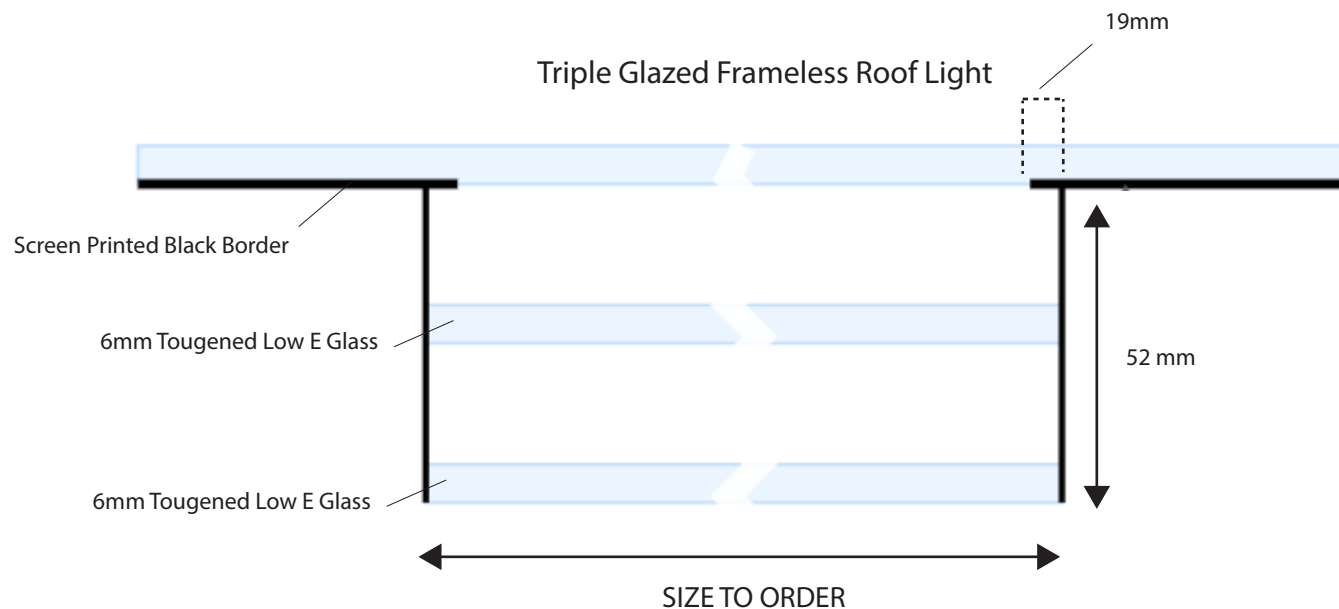

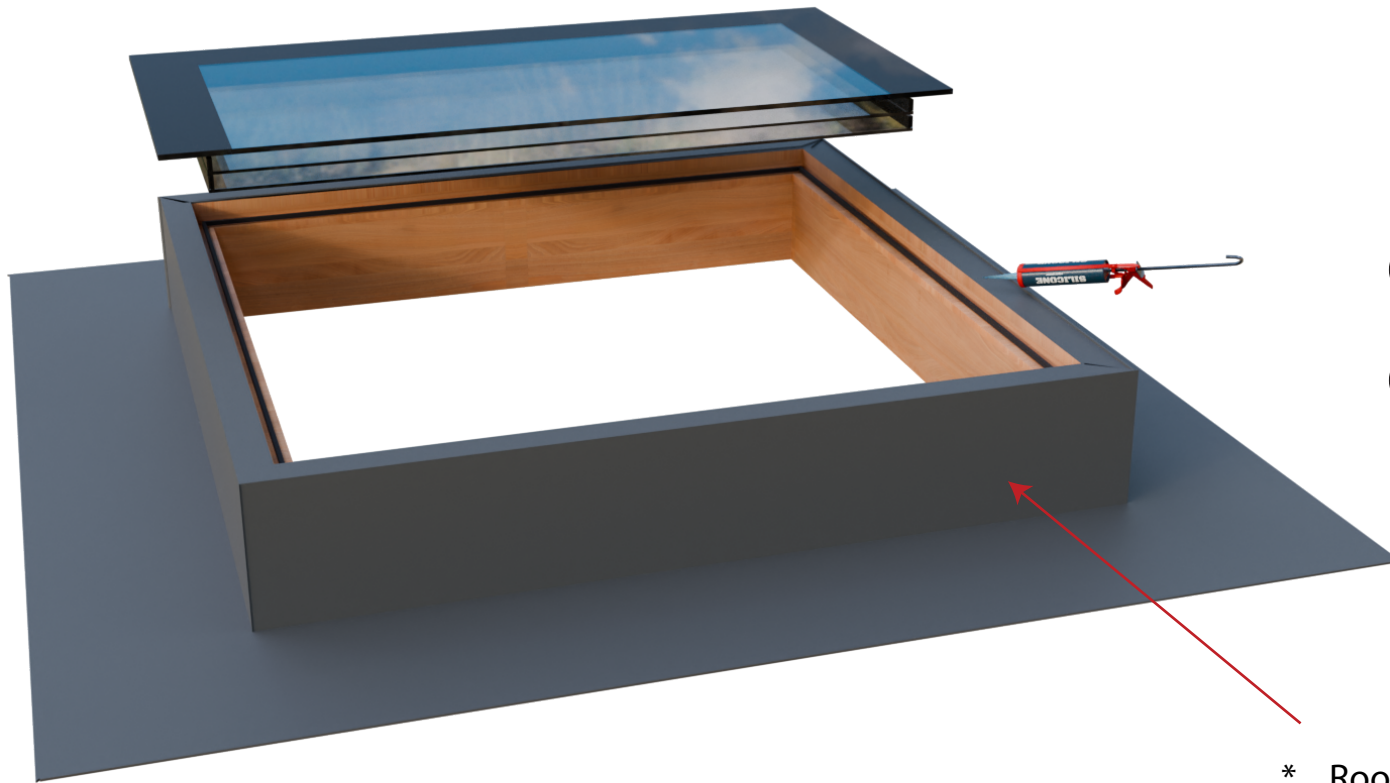

- ① Apply Glazing Tape
- ② Apply Structural Glazing Silicone

\* Roofing Membrane is supplied by others and should be fitted prior to Roof Light Installation